

# EnergyCell OPzS Premium Quality Batteries for Renewable Energy Storage



BATTERIES



SOLAR PV



WIND



GENSET





TECHNICAL FEATURES & PRODUCT BENEFITS

1 Positive Plates

- Tubular plate design
- Special low antimony lead alloy ( $\leq 1.65\%$  Sb)
- Red Lead in-house production by 99,9% Pure Lead
- Dry Filling process

- ✓ Long cycle life
- ✓ Excellent cycling properties
- ✓ Quality and homogeneity
- ✓ High capacity performance
- ✓ Reduced corrosion
- ✓ Reduced self-discharge rate
- ✓ Increased tolerance even in cases of poor charging conditions

2 Negative Plates

- Paste mixture ensures high adherence and cohesion
- Pasted negative plates of grid design
- Optimized low antimony lead alloy
- Robust construction
- Long life expander

- ✓ Stability
- ✓ Increased cyclic performance
- ✓ Long battery life

3 Gauntlet

- Highly microporous material
- Fine pore structure
- Low electrical resistance

- ✓ Effective active material retention
- ✓ Eliminates active mass shedding

4 Bottom Bar

- Ultrasonic welding

- ✓ Secured fit to the gauntlet
- ✓ Long battery life

5 Pole bridge

- Welding with high quality alloy
- Optimized design

- ✓ Increased robustness and durability
- ✓ Consistent and uniform poles-bridge-plate block connection

6 Electrolyte

- High purity sulphuric acid with nominal density of 1.24 +/- 0,01 kg/l (20°C)

- ✓ Low self discharge rates
- ✓ Excellent performance on deep discharges

13 Monoblocks' Internal Intercell Connectors

- Copper bars premium design
- Outside of the container connection

- ✓ High conductivity
- ✓ Safe and long operational life

12 External Intercell Connectors

- Flexible
- Copper
- Fully insulated
- Fixed with plastic head bolt safety screw and probe hole on the top

- ✓ Allow voltage measurements
- ✓ High conductivity
- ✓ Increased safety

11 Pole Insert

- Brass insert
- Threaded female M10 terminal posts

- ✓ High conductivity
- ✓ Maximum torque retention

7 Separators

- Manufactured from microporous silica-based PVC material
- Allow migration of ions during charge/discharge
- More acid in the surrounding area of the plates

- ✓ Secured protection against short circuits
- ✓ High temperature stability
- ✓ Mechanical strength
- ✓ Low internal resistance

8 Container / Lid

- High impact resistant, transparent SAN (Styrene Acrylonitrile) for the container
- Robust ABS (Acrylonitrile Butadien Styrene) Material for the lid
- Sealing between container - lid with polyurethane Stobicoll resin
- 100% leakage quality control with high precision Froehlich equipment

- ✓ Easy visual electrolyte level monitoring
- ✓ Long term leakage free operation
- ✓ Unsurpassed mechanical strength
- ✓ Robust and durable battery construction

9 Ceramic Vent Plugs


- Low maintenance design
- Flame arresting
- Funnel plugs also available

- ✓ Efficient containment of acid fumes
- ✓ No electrolyte spillage
- ✓ Reduced water evaporation
- ✓ Funnel plugs allow topping-up and electrolyte density measuring without plug removal
- ✓ Increased safety

10 Sliding Poles

- Premium sliding design with rubber seal in the lid
- Corrosion resistance

- ✓ Effectively prevents top lid cracks and acid leakages
- ✓ Positive plate's expansion is safely absorbed
- ✓ Optimum current conductivity
- ✓ Perfect sealing
- ✓ Allow impedance measurements
- ✓ Safe and long operational life

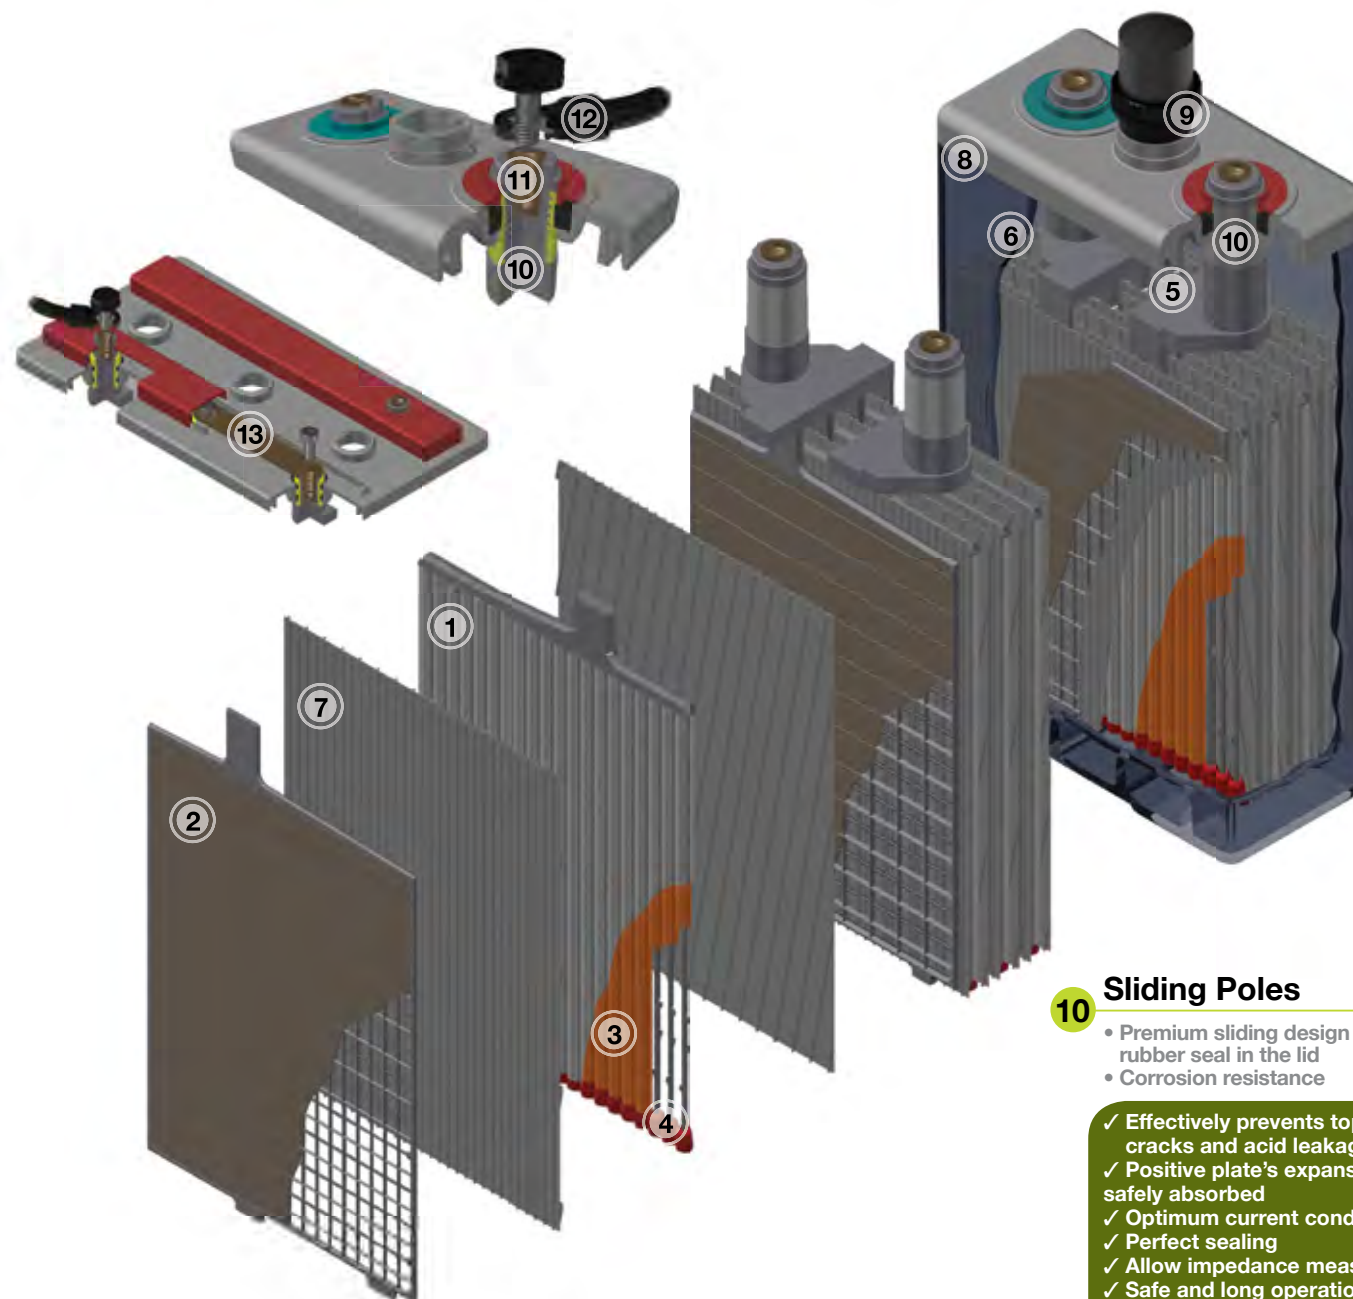




**PRODUCT RANGE**

Type	Positive Plates Number	Number of Poles	Nom. capacity (Ah at 20°C)					Length (mm)	Width (mm)	Height <sub>1</sub> (mm)	Height <sub>2</sub> * (mm)	Poles Distance	Filled Weight (approx. kg)	Dry Weight (approx. kg)	Internal Resistance (mOhm)	Short Circuit Current (A)
			C240 1.85 Vpc	C120 1.85 Vpc	C48 1.80V pc	C24 1.80 Vpc	C12 1.80 Vpc									
2V 2 OPzS 185	2	2	197	187	168	148	132	103	206	355	369	-	14	8	1.620	1240
2V 3 OPzS 260	3	2	274	263	235	209	188	103	206	355	369	-	16	11	1.083	1860
2V 4 OPzS 300	4	2	310	300	272	243	224	103	206	355	369	-	18	13	0.847	2380
2V 5 OPzS 375	5	2	391	378	343	307	281	124	206	355	369	-	21	15	0.671	3000
2V 6 OPzS 450	6	2	470	454	411	368	338	145	206	355	369	-	26	19	0.575	3500
2V 5 OPzS 550	5	2	574	553	498	444	413	124	206	471	485	-	28	21	0.608	3300
2V 6 OPzS 660	6	2	686	661	596	530	494	145	206	471	485	-	34	24	0.518	3900
2V 7 OPzS 750	7	2	780	750	676	602	564	166	206	471	485	-	39	28	0.453	4450
2V 5 OPzS 900	5	2	948	904	797	695	639	145	206	646	660	-	42	29	0.537	3750
2V 6 OPzS 965	6	2	1006	966	859	754	703	145	206	646	660	-	46	33	0.447	4500
2V 7 OPzS 1230	7	4	1286	1230	1088	950	877	191	210	646	660	80	60	43	0.378	5350
2V 8 OPzS 1275	8	4	1330	1278	1139	1001	934	191	210	646	660	80	64	47	0.327	6200
2V 9 OPzS 1480	9	4	1546	1484	1319	1157	1076	233	210	646	660	110	73	53	0.292	6950
2V 10 OPzS 1590	10	4	1656	1592	1419	1248	1165	233	210	646	660	110	78	57	0.261	7750
2V 12 OPzS 1905	12	4	1985	1908	1695	1487	1391	275	210	646	660	140	91	66	0.228	8850
2V 11 OPzS 2285	11	4	2369	2286	2064	1830	1698	275	210	797	811	140	111	76	0.238	8500
2V 12 OPzS 2225	12	4	2294	2226	2024	1807	1701	275	210	797	811	140	115	81	0.225	9000
2V 14 OPzS 2765	14	6	2868	2770	2505	2224	2069	397	212	772	786	110	143	96	0.195	10350
2V 15 OPzS 2920	15	6	3019	2921	2650	2361	2208	397	212	772	786	110	149	103	0.176	11500
2V 16 OPzS 2970	16	6	3065	2972	2710	2424	2279	397	212	772	786	110	155	109	0.160	12600
2V 18 OPzS 3780	18	8	3917	3780	3419	3038	2811	487	212	772	786	110	184	125	0.140	14450
2V 20 OPzS 4075	20	8	4217	4076	3696	3291	3057	487	212	772	786	110	201	135	0.125	16200
2V 24 OPzS 4620	24	8	4769	4620	4199	3747	3508	576	212	772	786	140	230	158	0.108	18800
6V 3 OPzS 240	3	2	252	242	221	199	184	233	224	345	377	-	41	30	1.138	1780
6V 4 OPzS 280	4	2	293	283	261	237	223	205	332	361	-	-	47	35	0.900	2240
6V 5 OPzS 385	5	2	403	389	355	320	298	380	205	332	361	-	61	44	0.760	2660
6V 6 OPzS 405	6	2	422	408	376	341	323	380	205	332	361	-	67	51	0.667	3040
12V 1 OPzS 85	1	2	91	86	78	71	65	272	205	332	361	-	38	24	3.226	620
12V 2 OPzS 130	2	2	137	132	121	111	106	272	205	332	361	-	49	38	1.613	1260
12V 3 OPzS 190	3	2	199	191	176	161	155	380	205	332	361	-	70	53	1.138	1780

\* Includes installed connectors and shrouds

**DRAWINGS**

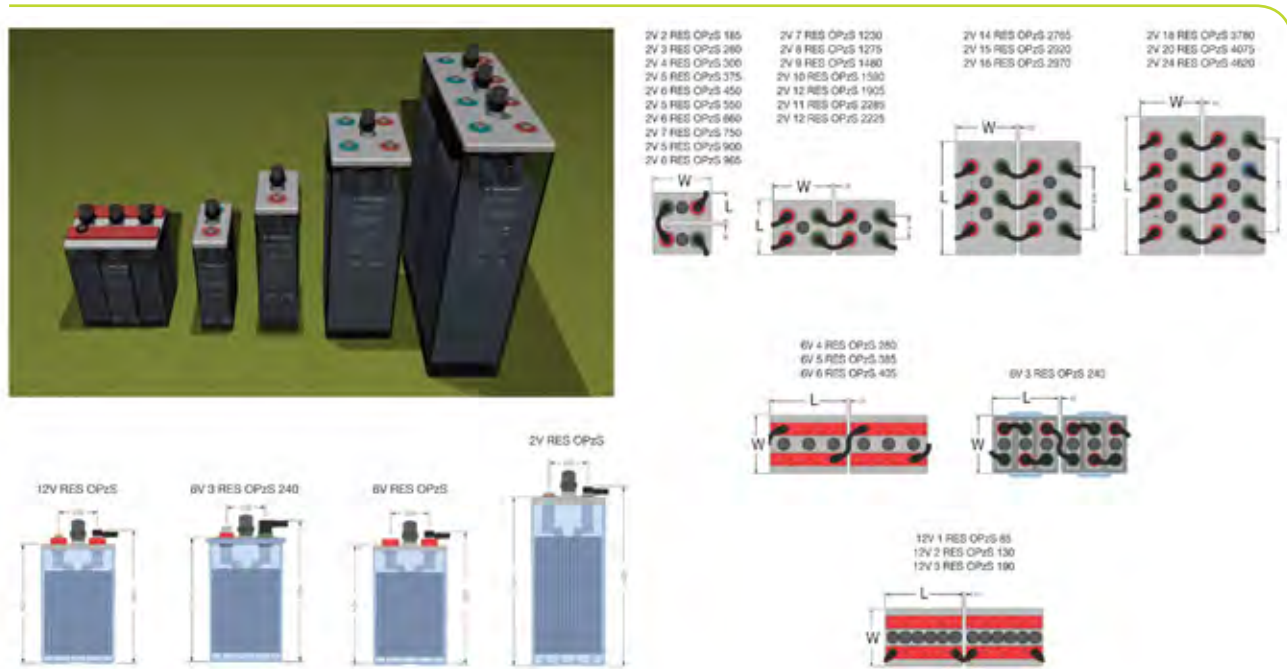

**EnergyCell**

**30 years of Experience in Battery Business**

- TOP 3 in the global advanced technology battery sector
- TOP 5 in the European industrial battery sector
- 98% of battery production is being exported
- Design and manufacturing of numerous premium solutions complying to demanding requirements

**“One Stop Solution”**

- From single components/products to turn-key solutions
- Robust high quality products & services portfolio
- Lifetime value maximization & total cost of ownership approach

**Extensive Global Know-how**

- Co-operation with TOP market players and equipment providers worldwide
- A fast growing Global Partners Network
- More than 300 totally independent off-grid Power Supply Systems installed worldwide

**Exceptional Customer Service**

- Highly experienced engineering team for design & development
- Pre-Sales & After-Sales Service providing global support
- Project Management competence

# EnergyCell



ET-MS\_150204 - EN



# EnergyCell

